AWEA BM-1600



Type: Vertical machining center Vertical
Brand: AWEA
Model: BM-1600
Year: 10-2006
C.N.C: Fanuc 0iMC
Serial number: 6053
Specifications:

With chip conveyor, high pressure pump, tool holders.

Macchine Utensili S.r.l.

Technical information

TABLE

Table dimensions: 2000x800 mm

CAPACITY

Longitudinal X-travel: 1600 mm
Cross Y-travel: 800 mm
Vertical Z-travel: 800 mm

SPINDLE

Spindle nose: 50 ISO
Spindle speed: 30-6000 giri/min.
Motor power: 15/18 Kw

ADVANCES

Rapid X,Y,Z axis: 20,20,18 mm/min

TOOL WAREHOUSE

Tool Stations: 30 nr.

SPECIFIC PROPERTIES

Distance spindle nose- table: 200-1000 mm

Distance spindle center – column 820 mm

2 gear range speed

Ø Max tool space occupied 125 mm

Max tool length 350 mm

Max tool weigth 15 kg

Machine weigth 16.000 kg

GMV Macchine Utensili s.r.l.
Via G. Paglia, 9 - 24050 Zanica (BG) IT - Tel. +39 035 591673 - Fax +39 035 593245
VAT no. and tax code 03535620169 - www.gmvmacchine.it - info@gmvitalia.it

Macchine Utensili S.r.l.






GMV Macchine Utensili s.r.l.
Via G. Paglia, 9 - 24050 Zanica (BG) IT - Tel. +39 035 591673 - Fax +39 035 593245
VAT no. and tax code 03535620169 - www.gmvmacchine.it - info@gmvitalia.it

Macchine Utensili S.r.l.




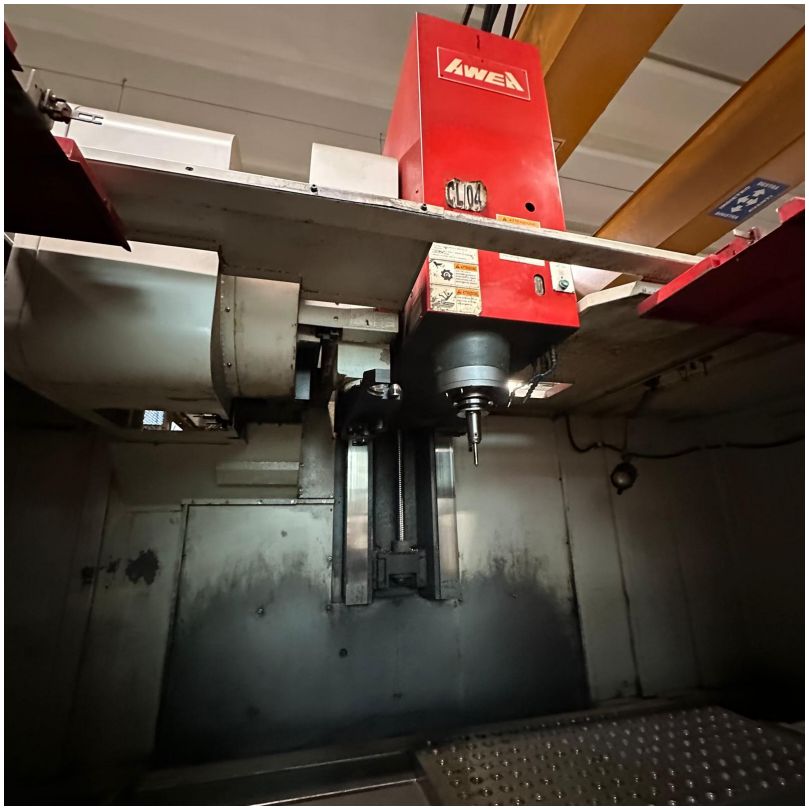

GMV Macchine Utensili s.r.l.
Via G. Paglia, 9 - 24050 Zanica (BG) IT - Tel. +39 035 591673 - Fax +39 035 593245
VAT no. and tax code 03535620169 - www.gmvmacchine.it - info@gmvitalia.it

Macchine Utensili S.r.l.



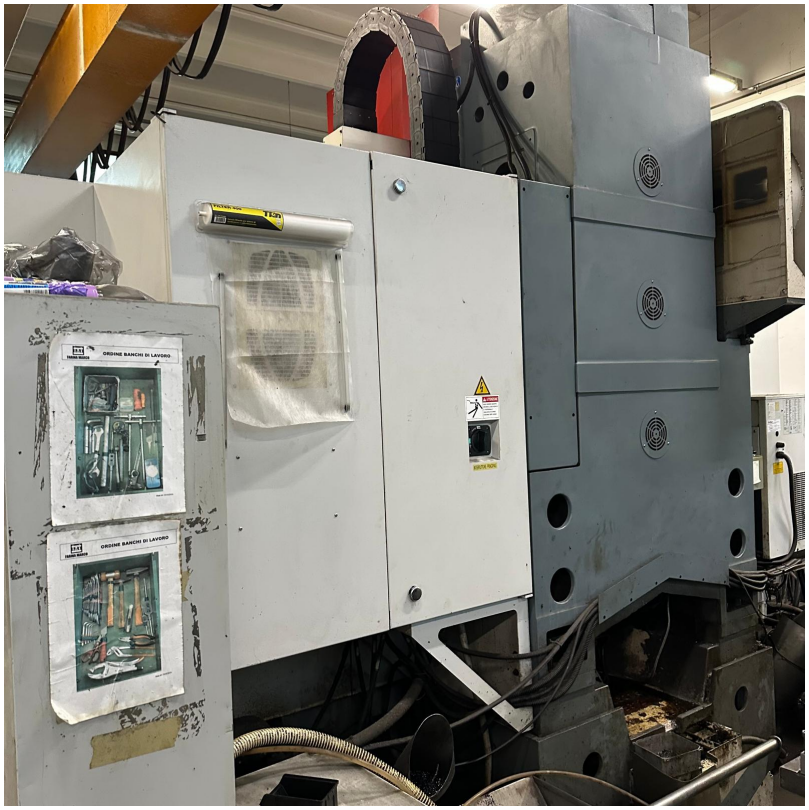

GMV Macchine Utensili s.r.l.
Via G. Paglia, 9 - 24050 Zanica (BG) IT - Tel. +39 035 591673 - Fax +39 035 593245
VAT no. and tax code 03535620169 - www.gmvmacchine.it - info@gmvitalia.it





GMV Macchine Utensili s.r.l.
Via G. Paglia, 9 - 24050 Zanica (BG) IT - Tel. +39 035 591673 - Fax +39 035 593245
VAT no. and tax code 03535620169 - www.gmvmacchine.it - info@gmvitalia.it


AWEA
AWEA MECHANTRONIC CO., LTD.
629, Suezhetou Section,
Kwanpu Rd., Hsinpu Town,
Hsinchu County, Taiwan
TEL :886-35-885191
FAX :886-35-885194
MODELLO BM-1600
MATRICOLA N. 6053
ANNO DI FABBRICAZIONE OCT-2006
PESO 16000 (kg)
Velocità mandrino 6000 (giri/min)
• TENSIONE 220 (V)
• POTENZA 40 (kVA)
• FREQUENZA 50/60 (Hz)
• FASE 3 (ø)
• Sezione cavo > 12 (mm)²