

R Series 600

CNC TAPPING CENTER

ARES-SEIKI®
EXCELLENCE THROUGH EXPERTISE

HIGH SPEED HIGH EFFICIENCY MACHINERY

- HIGH RESPONSE SERVO SYSTEM
- HIGH SPEED 3 AXES RAPID TRAVERSE



- Spindle speed 8000rpm (STD)
- Spindle speed 12000rpm (OPT)
- Rigid tapping 3000rpm
- Spindle nose taper BT40
- 3 axes rapid traverse X, Y, Z : 36, 36, 36m/min
- Dual electric cases (Heat insulated)
- High speed mechanical ATC system T-T : M2.2 / F3.2 sec

R Series 600 CNC DRILLING & TAPPING CENTER

MACHINE SPECIFICATIONS

	Unit	Mitsubishi	FANUC
Table size	mm	700 x 410	
Max. table load	kg	250	
Longitudinal table travel (X)	mm	600	
Cross table travel (Y)	mm	400	
Vertical head travel (Z)	mm	400	
Table to spindle nose	mm	120 ~ 520	
Spindle taper		BT40	
Pull stud		MAS403 P40T-1(45°)	
Spindle motor	kW	7.5 / 5.5	7.5 / 5.5
X drive motor	kW	1.5	1.6
Y drive motor	kW	1.5	1.6
Z drive motor	kW	3.0	3.0
Spindle speeds	rpm	8000	
X, Y, Z axis rapid traverse	m / min	36 / 36 / 36	
Magazine capacity	no.	12	
Max. tool weight	kg	3	
Max. tool length	mm	250	
ATC time	sec	M2.2 / F3.2 (T-T)	
Floor space	mm	1700 x 2750 x 2750	
Net weight	kg	3550	

CONTROLLER SPECIFICATIONS


	Mitsubishi	FANUC
	M70V-B	0iMD
Max. controlled axis	5	4
Max. simultaneous axis	4	4
Standard controlled axis	3	3
Program storage length	1280m	1280m
Work piece coordinates	54	54
Macro common variables	700	600
Tool offset pairs	400	400
Conversational programming	NAVI	Manual Guide Oi
Monitor	8.4" TFT LCD	
Multi-language display	O	O
ABS servo motor	O	O
Tool length compensation	O	O
Tool path compensation	O	O
On-screen drafting	O	O
High speed data serve & Ethernet	O	OP
High speed & high accuracy machining control mode	G05.1 Q1	
Interface	RS232 / RJ45	
Memory card input / output	O	O

O: Standard

OP: Option

★ Tool change time supplied with standard 60Hz power. For electrical requirements other than this standard, please contact one of our personnel.

MACHINE DIMENSIONS

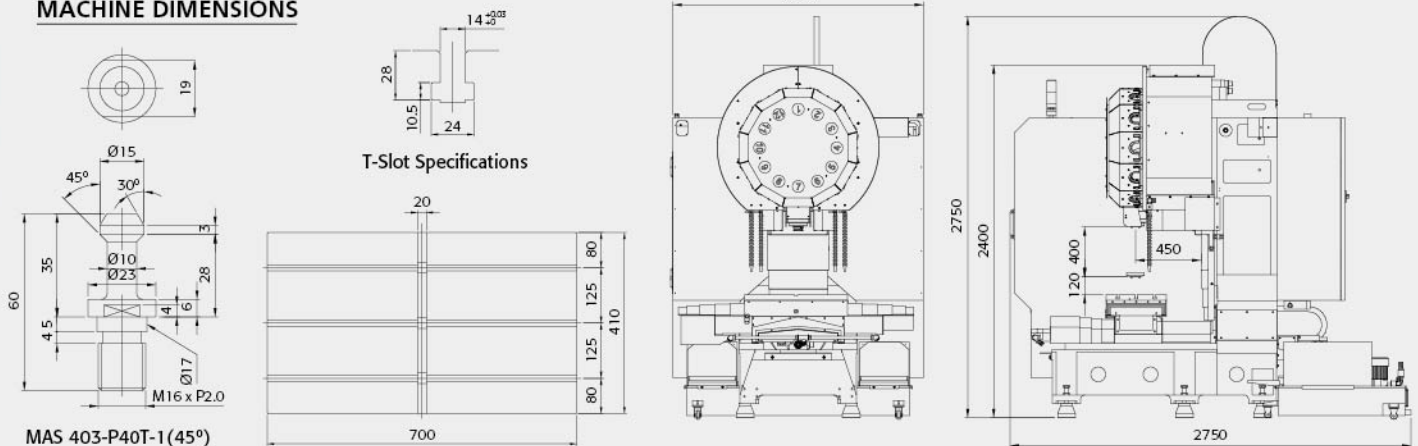

STANDARD ACCESSORIES

- Toolbox and tools
- Auto. lubrication system
- Tool coolant system
- Spindle air blow system
- Leveling bolts and pads
- Dual electric cases (Heat insulated)
- Dual-color alarm light
- Work light
- TFT LCD

OPTIONAL ACCESSORIES

- Servo ATC
- Transformer / stabilizer
- Work piece air blow system
- Spindle speed 12000rpm high speed spindle (With spindle oil cooling system)
- Air gun / Water gun
- Chip conveyer with cart
- Oil / water partition
- Auto. tool length measurement
- Damaged cutting tool sensor
- Auto. door
- High speed & high accuracy machining control mode G05 P10000 (Mitsubishi M70-A)
- The 4th axis (NC Indexing Table)
- Fifth axis (4th axis with sloped rotary table)
- Oil mist collector
- Full enclosed splash guard (Top cover)
- CE

ARES-SEIKI
ARES MACHINERY CO., LTD.

No. 256, Tu-Cheng Rd., Da-Li, Taichung, Taiwan 41274
Tel: +886-4-2492-5555 Fax: +886-4-2496-6959

www.ares-seiki.com
ares999@ms16.hinet.net

★ ARES-SEIKI reserves the right to change the specifications of its machines as technology develops without prior notice.

2014.07 Designed by S & J Corp. +886-4-3703-8989

ARES-HE-15-M0C0E-500